

C SERIES SELF CONTAINED ICE CUBE MAKER

Entirely made of stainless steel, the C series solid ice cube makers from Kastel are a premium product and incorporate all the latest technology to ensure the highest efficiency and a long service life.

The ice is produced by spraying water on a horizontally mounted copper evaporator which freezes and forms high density, crystal clear ice cubes.

Purer than the water from which they are made, solid crystal clear cubes are the best option for all those situations where we need to keep drinks cool for a long period of time without watering them down.

BACK COUNTER MACHINES: These medium sized free standing ice machines can be fitted in most work areas, and are advantageous when a greater amount of ice is needed in a shorter period of time.

The stainless steel construction is built strong for demanding environments and is elegant in design. Ice Machine Solutions' range of Kastel ice makers are also available with electronic boards or mechanical timers. All models are for 'tropical use' where they can produce ice even at room temperatures of 43°C and water temperature of 38°C.

Features


- Full stainless steel shell and door
- Electro Mechanical Operation
- Technical support available
- Spare parts for most makes and models



**18gm full crystal clear hard
ice cube**




Manufactured in Italy



Energy efficient



Stainless steel body and door

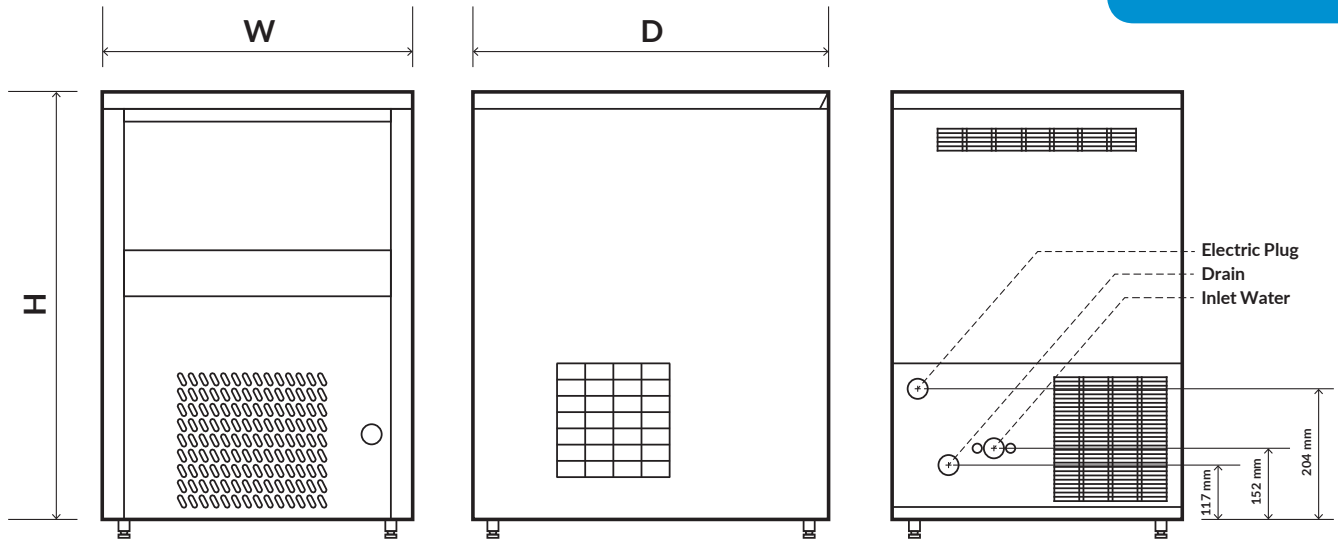

	C60	C80	C100
Control System	C60M	C80M	C100M
Cooling System	Air / Water Cooled	Air / Water Cooled	Air / Water Cooled
Ice Production in 24 Hours	60 kg Up to 3529 cubes	80 kg Up to 4705 cubes	100 kg Up to 5882 cubes
Ice Production per cycle	64 cubes	64 cubes	64 cubes
Storage Capacity	40 kg	40 kg	60 kg
Voltage Standard	220-240V - 50Hz	220-240V - 50Hz	220-240V - 50Hz
Power Consumption	780 W	1050 W	1200 W
Type of Refrigerant	R 452 A	R 452 A	R 452 A
Dimensions (W x D x H)	740 x 605 x 915 mm	740 x 605 x 915 mm	740 x 605 x 1015 mm
Legs*	+ 80-150 mm	+ 80-150 mm	+ 80-150 mm
Net Weight	72 kg	79 kg	82 kg
Packing Dimensions	820 x 680 x 1052 mm	820 x 680 x 1052 mm	820 x 680 x 1150 mm
Gross Weight	86 kg	88 kg	91 kg

A = Electronic A-M = Mechanical Control *Options Available

WATER-TEMPERATURE	38°C	70%	65%	60%	55%	50%
	32°C	80%	70%	60%	55%	55%
	25°C	90%	80%	70%	60%	60%
	15°C	100%	100%	80%	70%	65%
	10°C	105%	100%	90%	80%	70%
	10°C	21°C	32°C	38°C	43°C	
	AMBIENT-TEMPERATURE					

DISTRIBUTED BY: