


specifications

SKT1000N-A Series

ActiveCore Series, 2 Glass Door Upright Fridge

Project: _____

Item No: _____

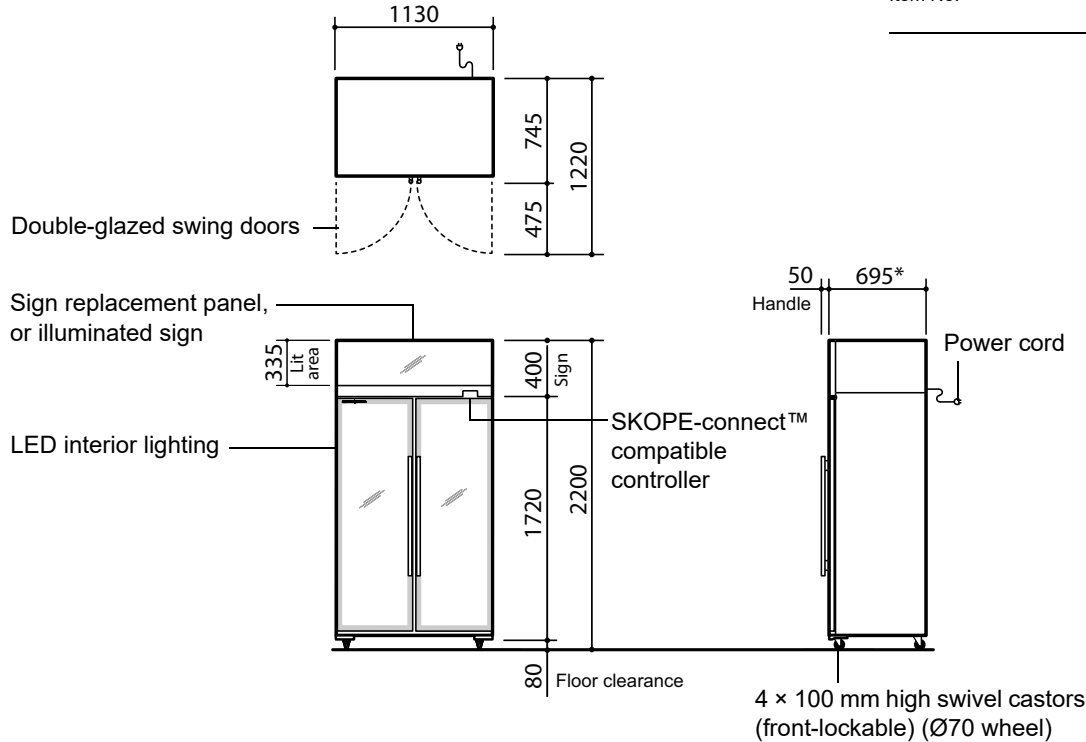

CABINET			
Model ID	SKT1000N-A	SKT1000N-AC	SKT1000-ACX
Doors	2 × self-closing, double-glazed, single low-e, lockable, argon-filled, toughened safety glass swing doors (hinged left hand, right hand)		
Internal door opening	2 × door openings: 1570 mm high × 450 mm wide		
Shelves	10 × adjustable height wire shelves: 500 mm wide × 470 mm deep		
Sign	Sign replacement panel	Illuminated sign	Illuminated sign
Material	Powder-coated galvanised steel or stainless steel interior and exterior		
PERFORMANCE			
Maximum ambient temperature	40°C		
Temperature range	1°C to 4°C (adjustable via SKOPE-connect™ 1°C to 15°C)		
GEMS class	M1		
GEMS energy consumption	3.79 kWh/24 h	3.97 kWh/24 h	4.61 kWh/24 h
GEMS annual running cost	\$415 p.a. (@ \$0.30/kWh)	\$435 p.a. (@ \$0.30/kWh)	\$505 p.a. (@ \$0.30/kWh)
ELECTRICAL			
Electrical safety climate class	5		
Interior side lighting	2 × 1400 mm, 15 W LED	2 × 1400 mm, 15 W LED	n.a.
Interior shelf lighting	n.a.	n.a.	10 × 415 mm, 6 W LED
Sign lighting	n.a.	1 × 1060 mm, 12 W LED	1 × 1060 mm, 12 W LED
Power cord	Supplied with 10 amp plug and 2.3 m lead		
Power supply	220-240 volts a.c. 50 Hz, single phase supply		
Current draw	3.0 amps (includes unit 2.6 amps)		
REFRIGERATION			
Controller	SCS Connect (SKOPE-connect™ compatible)		
Connectivity interface	Bluetooth® wireless technology		
Refrigeration system	Top mounted, integral, removable ActiveCore refrigeration unit (UTHCNI-0010)		
Refrigerant	R290/99 g (natural refrigerant)		
Nominal capacity	740 watts		
Heat rejection (Avg/peak)	160 watts/220 watts	165 watts/235 watts	190 watts/280 watts
Drainage	No plumbing required		

DIMENSIONS		
	External	Internal
Height	2200 mm	1570 mm
Width	1130 mm	1030 mm
Depth	745 mm	555 mm
Floor area	0.84 m ²	
Weight	225 kg	
Gross volume	897 L	

* Depth 695 mm excludes removable door handle and door lock bracket

Dimensional tolerances		
Before installing this cabinet allow the following dimensional tolerances:		
Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5 mm	
More than 1 metre	-5 mm to +10 mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	+15 mm

Ventilation requirements	
Top	300 mm
Sides	Not required
Back	Not required
Bottom	Not required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2018 SKOPE Industries Limited

PSS0569 | Rev. 2.2 Apr. 2024

SKOPE INDUSTRIES LIMITED

Australia Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

