

Vacc-Safe freezers can be used in hospitals, epidemic prevention stations, universities, scientific research institutes, and electronic chemical industry enterprise labs. It is strictly prohibited to store flammable and explosive dangerous goods, strong acids, strong alkalis and other corrosive goods.



VS-25L106/40L106

Safer Storage Superior Temp. uniformity & Precise control

- Microcomputer Temperature Control System.
- Temperature accuracy 0.1°C.
- USB port, temperature and alarm records traceable.
- Multi-alarm functions.

Humanized Design Friendly for daily use

- Safety lock.
- Multi layers gaskets better temperature insulation.
- Wide voltage range design.
- Cable port.
- Remote alarm contact.
- Anti-condensation door.


LCD Temperature Control Systems

Button-type control panel is easy to operate, the temperature and alarm settings can be adjust on the panel.




LBA Forming Technology

The world's leading fourth generation foaming agent More uniform density, Better insulation, more energy-saving. More reasonable foaming layer design, larger interior storage space.

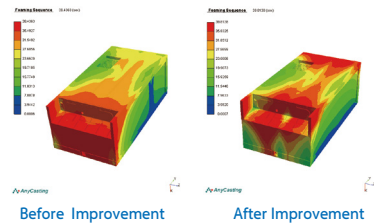

Three-dimensional seal

The unique three-dimensional seal, through the double-layer door seal and the multi-layer airbag sealing design, can effectively reduce the leakage of cold air and achieve best thermal insulation performance.

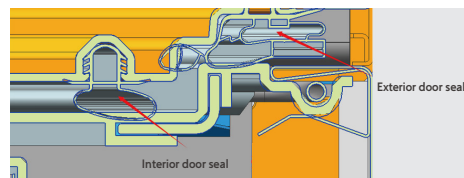

| Item | Model No. | VS-25L106 | VS-40L106 |
|-------------------------------|--------------------------------|---------------------------|---------------------------|
| Product structure data | Temperature Range | -10~ -25 °C | -20~ -40 °C |
| | Fridge Storage Volume(L) | 106 L | 106 L |
| | External Material | High quality coated steel | High quality coated steel |
| | Internal Material | High quality coated steel | High quality coated steel |
| | Product Dimensions(mm)(wxdxh) | 595*615*812 | 595*615*812 |
| | Interior Dimensions(mm)(wxdxh) | 455*460*595 | 455*460*595 |
| | Net/Gross Weight | 39/44 | 43/48 |
| Technical data | Cooling Type | Direct cooling | Direct cooling |
| | Defrost type | Manual | Manual |
| | Climate Class | N | N |
| | Rated Voltage/Frequency(V/Hz) | 220-240V/50Hz | 220-240V/50Hz |
| | Rated Power(W) | 115 | 230 |
| | Rated Current(A) | 0.7 | 1.5 |
| | Refrigerant | R600a | R290 |
| Control | Controller | Microprocessor | Microprocessor |
| | Display | LCD display | LCD display |
| Product Performance | Temperature Accuracy | 0.1 °C | 0.1 °C |
| | Temperature uniformity/°C | ≤1.5 C | ≤3 C |
| Alarms | Power Failure Alarm | Y | Y |
| | Sensor Failure Alarm | Y | Y |
| | Environment Temperature Alarm | Y | Y |
| | Door ajar Alarm | Y | Y |
| | High Temperature Alarm | Y | Y |
| | Low Temperature Alarm | Y | Y |
| | Remote Alarm | Y | Y |
| Accessories | USB | Y | Y |
| | Anti-condensation Door | Y | Y |
| | Backup Battery | Y | Y |
| | Handle | Grip (Reverse door) | Grip (Reverse door) |
| | Cable Port | 1/25mm | 1/25mm |
| | Castors/type | Feet | Feet |